

Impact of Spectrum Refarming for 4G Rollout

Amit Agrawal, Neetu Sharma, Neelesh Gupta

Abstract:- Spectrum is an expensive resource and has to be efficiently used for rollout of any technology. Wireless spectrum is the backbone of the digital communication era, and a limited resource. LTE/4G technology has maximum flexibility to run on 25 different frequency bands e.g. 700MHz, 850MHz, 900MHz, 1800MHz, 2300MHz etc. This feature of LTE/4G enables any telecom operator to use existing spectrum resource of 900 MHz or 1800 MHz through Spectrum Refarming. In addition, lower frequencies such as GSM 900/1800 propagate further and penetrate buildings better than higher frequencies, making them the preferred choice for LTE coverage. This work represents a practical scenario when a telecom operator having 2G spectrums of 6.9 MHz in 1800 MHz band and decides to rollout LTE/4G by extracting 1.4 MHz carrier from the existing spectrum resources. It presents a broad description of the practical settings in which the automatic frequency assignment is used in left out 5.5 MHz of 1800 MHz spectrum using ICDM for BCCH & TCH channels and it will help the operators to understand the importance of efficient use of spectrum.

Keywords:- GSM, AFP Tool, BCCH & TCH.

I. INTRODUCTION

Wireless spectrum is the backbone of the digital communication era, and a limited resource. Such a limitation only makes it obligatory that prompt initiatives are taken that would support use of available spectrum in most efficient manner.

Spectrum re-farming can be defined as a combination of present and future administrative, financial and technical measures within the limits of frequency regulation in order to make a specified frequency band available for a different kind of usage or technology. The measures may be implemented in the short, medium or long term. In simple terms, re-farming essentially means shifting operators from one frequency to another within the band or across the band.

Frequency Spectrum

The **radio spectrum** is the part of the electromagnetic spectrum from 3 Hz to 3000 GHz (3 THz). Electromagnetic waves in this frequency range, called radio waves, Spectrum are frequencies used to “make wireless”. The radio waves (aka **frequencies**) have been broken into chunks (aka **bands**).

Cellular Technology is independent of Spectrum bands, There are identified “preferred” bands of spectrum for each technology, and details are as follows:-

- 2G / 3G /4G / Wi-Fi are different methods (technologies) of using spectrum
- 2G runs on 900 MHz band and 1800 MHz band

- 3G runs on 2100 MHz band, 1800 MHz band, 900 MHz band and 850 MHz band
- LTE has maximum flexibility to run on 25 different frequency bands.

Evolution of Technology

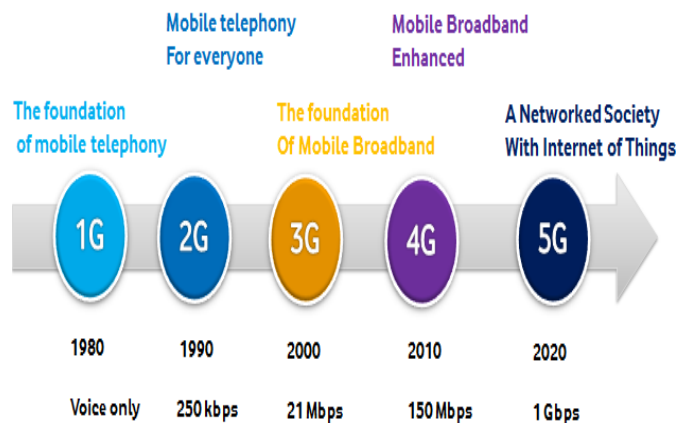


Fig.1

Through the auction process, the operator of a cellular system is given a limited frequency band to use in the area. This spectrum is divided in a number of carriers. A GSM radio network can include hundreds of cells in a city. Thousands of channels should be assigned to these cells. Therefore the carriers can be reused within an area. Any effort to lay down manual frequency plans promulgates inefficiency in the cellular radio systems. Automatic frequency planning is required for automatic generation and optimization of the frequency plan.

II. LITERATURE REVIEW

A lot of work is already in progress to smoothen the automatic frequency planning in GSM network, with minimal interference in a very limited allocated spectrum. Literature survey of the earlier work done on the topic is as follows:

Umar M et.al. presented a novel and ingenious algorithm for automatic generation and optimization of the frequency plan whereby curtailing the intra-system interference levels within the acceptable ranges of the key performance indicators (KPI's) defined for any real time cellular network. The automatic frequency planning and optimization has been done using the concept of Inter-Cell Dependency Matrix (ICDM) which contains cell correlations in terms of the affect one cell has on the other primarily with regards to the co-channel interference.

Venkateswarlu K et.al. Proposed an innovative process, which automatically assigns optimum frequencies for new network and also for new sites in an existing network. It has been shown that significant improvement over the current design methodology is achieved, with reduction in operational costs. Hence, the application of this process leads to an efficient and effective way for RF planning. Also, in coordination with Automatic Cell Planning algorithms, the new proposed process can function as a network advisory system that optimizes network resources efficiently

Zhouyun Wu et.al. used two IM generation algorithms based on source data fusion. Data fusion in one algorithm is to reinforce MMRs data, using the frequency domain information of Drive test data from the same region. Data fusion in another algorithm is to reshape Drive Test data, using the traffic distribution information extracted from MRs from the same region. The fused data contains more complete information so that more accurate IM can be obtained.

Aardal Karen. I et.al. Presented a broad description of the practical settings in which frequency assignment is applied. The solution methods are divided in two parts: Optimization and lower bounding techniques on the one hand, and heuristic search techniques on the other hand. From the mathematical perspective, there is still enough room for improvement of the solution and lower bounding techniques for all variants of frequency assignment problems. The still practical relevance of, in particular, the minimum interference and minimum blocking FAPs can be an additional motivation to do so.

Chen Lei et.al. Contributed in dealing with some planning and optimization problems in cellular networks. To master the complexity, the planning and optimization algorithms have to become more advanced, efficient, and automatic. The optimization process should become an integrated part of the network, and the work of manual tuning must be reduced as much as possible. The development of optimization tools integrating the models and algorithms for the problems is a natural follow-up to work.

III. CONCEPTS

The available frequency spectrum is very congested, with only narrow slots of bandwidth allocated for cellular communications. Spectrum allocated for GSM-900 & GSM 1800 (DCS1800) are:

System	Uplink	Downlink
GSM 900	890-915 MHz	935-960 MHz
GSM 1800	1710-1785 MHz	1805-1880MHz

Table 1

Spectrum flexibility in 4G/LTE

In LTE, Bandwidth will be divided into sub-carrier of 15 kHz which makes symbol time of 66.7 micro sec. The CP (Cyclic Prefix) is copy of the last part of the symbol and inserted in each symbol in order to preserve the subcarrier orthogonality. It is generally 1/4 to 1/32 of symbol period.

- Total 7 symbols are there for Normal operation and for extended operation 6 symbols will be used.
- Resource Element is one OFDM sub-carrier during one OFDM symbol interval.
- Resource Block (RB) is 12 OFDM sub-carrier during one 0.5ms slot.
- Minimum unit that can be allocated by scheduler is 2 Resource Block which is sometime referred as Scheduling Block (SB) and is equal to the TTI of 1ms.
- LTE physical layer supports any bandwidth from 1.4 MHz to 20 MHz in steps of 180 kHz (resource block). Current LTE specification supports a subset of 6 different system Channel bandwidths. All UEs must support the maximum bandwidth of 20 MHz

Channel BW [MHz]	1.4	3	5	10	15	20
Number of RBs	6	15	25	50	75	100

Table 2

IV. NEED OF WORK

Study for Spectrum Refarming in any frequency band is needed so that the available resource has to be administered and reused carefully in order to control mutual interference. Impact analysis is required in a practical scenario when a telecom operator having 2G spectrum of 6.9 MHz in 1800 MHz band and decides to rollout LTE/4G by extracting 1.4 MHz carrier from the existing spectrum resources.

V. PROPOSED METHODOLOGY

Initially the area has to be selected where the operators running 2G/GSM operation at 1800 MHz band and using both physical parameters sites will be plotted in Frequency planning tool. ICDM model will be generated using Mobile measurement reports collected from the BSC logs and different settings were applied for extracting 1.4MHz spectrum for 4G rollout. The proposed method is more efficiently explained with the help of flowchart given below:

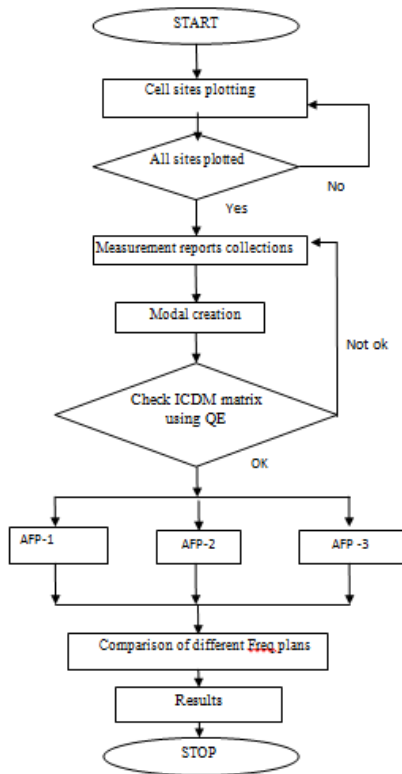


Fig 2

VI. IMPLEMENTATION

Firstly, a city with 1127 sectors was selected in MPCG where a Mobile service operator was providing their GSM services in 1800 MHz band with 6.9 MHz of spectrum. In 6.9 MHz, operator currently has 34 ARFCN as 1 ARFCN is of 200KHz. Operator has divided these 34 ARFCNs in two bands i.e. 14 BCCH Band ARFCN & 20 TCH Band ARFCN.

With the rollout of new technologies in telecommunication domain, GSM is now becoming an old technology. So the telecom operator having 2G spectrums of 6.9 MHz in 1800 MHz band decides to rollout LTE/4G by extracting 1.4 MHz carrier from the existing spectrum resources. It leaves only 5.5 MHz for providing GSM services i.e only 27 ARFCN. Now the objective is to minimize the interference & Bad quality percentage by automatic planning of ARFCN assignments (AFP) with different setting of ARFCN allocation in BCCH & TCH Band.

VII. EXPERIMENTAL RESULTS

For optimum planning of 5.5 MHz or 27 ARFCN, three plans were generated.

1. Plan-1 10 BCCH & 17 TCH Plan: After more than 20 K evaluations, 11 best plans were found to minimize Affected Traffic to 2138 Erlangs.

KPI	Pre-Optimized	Last Best
Total Affected Traffic	375.62	2138.05
Interference Affected Traffic	222.14	945.64
BCCH->TCH Interference	3.19	8.11
TCH->BCCH Interference	1.02	4.27
TCH->TCH Interference	177.11	677.05
BCCH->BCCH Interference	40.82	256.21
Handover Affected Traffic	22.14	332.55
Accessibility Affected Traffic	131.34	854.76
User-defined Affected Traffic	0	0
Frequency-Restriction Affec...	0	0
Site-Separation Violations Af...	0	5.1
Forbidden Relations	1158	0
No. BCCH Frequencies	14	10
BCCH Spectrum 1800	628-641	628-637
No. TCH Frequencies	20	17
TCH Spectrum 1800	642-649, 678-...	638-649, 678-...

Fig 3

2. Plan-2 11 BCCH & 16 TCH Plan: After around 20 K evaluations, 24 best plans were found to minimize Affected Traffic to 1227 Erlangs.

KPI	Pre-Optimized	Last Best
Total Affected Traffic	442.25	1227.12
Interference Affected Traffic	269.93	628.89
BCCH->TCH Interference	3.14	7.13
TCH->BCCH Interference	1.32	4.45
TCH->TCH Interference	219.91	455.89
BCCH->BCCH Interference	45.55	161.43
Handover Affected Traffic	22.6	71.74
Accessibility Affected Traffic	149.08	524.14
User-defined Affected Traffic	0	0
Frequency-Restriction Affec...	0	0
Site-Separation Violations Af...	0.65	2.35
Forbidden Relations	1041	0
No. BCCH Frequencies	14	11
BCCH Spectrum 1800	628-641	628-638
No. TCH Frequencies	20	16
TCH Spectrum 1800	642-649, 678-...	639-649, 678-...

Fig 4

3. Plan-3 12 BCCH & 15 TCH Plan: After more than 20 K evaluations, 19 best plans were found to minimize Affected Traffic to 1048.24 Erlangs.

KPI	Pre-Optimized	Last Best
Total Affected Traffic	490.86	1048.24
Interference Affected Traffic	296.31	694.34
BCCH->TCH Interference	8.87	6.82
TCH->BCCH Interference	7.52	3.34
TCH->TCH Interference	231.19	586
BCCH->BCCH Interference	48.73	98.19
Handover Affected Traffic	42.7	29.29
Accessibility Affected Traffic	151.85	321.21
User-defined Affected Traffic	0	0
Frequency-Restriction Affec...	0	0
Site-Separation Violations Af...	0	3.4
Forbidden Relations	992	0
No. BCCH Frequencies	14	12
BCCH Spectrum 1800	628-641	628-639
No. TCH Frequencies	24	15
TCH Spectrum 1800	638-649, 678-...	640-649, 678-...

Fig 5

Comparison of Three Frequency Plan: By applying the Frequency Plan, the user will be able to compare QE results between 2 or more evaluation plans (before and after the Frequency Plan application)

- The graph section displays a graph that compares the two evaluations.
- The comparison table displays a table that compares the two evaluations in terms of total traffic, total bad quality, interference and coverage.

Calculation	Total BQ (%)	Interference (%)	Coverage (%)	BCCH Layer Total BQ%	Total BCCH + BQ %
Post-1.4 MHz Plan-1_10 BCCH	6.4	4.8	1.6	15.1	21.5
Post-1.4 MHz Plan-2_11 BCCH	4.7	3.2	1.6	11.9	16.6
Post-1.4 MHz Plan-3_12 BCCH	5.3	3.7	1.6	9.8	15.0
Pre- 6.9 Mhz plan_14 BCCH	2.9	1.4	1.6	7.7	10.7

Table 3

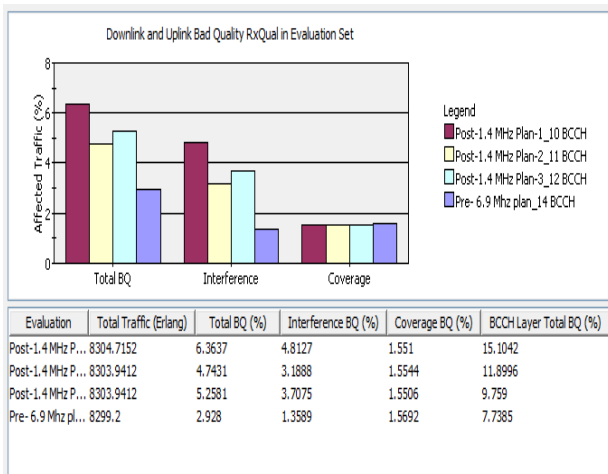


Fig 6

VIII. CONCLUSION

The comparison results shows for the telecom operator, Plan no. 3 with 12 BCCH & 15 TCH ARFCN allocation is best to extract 1.4 MHz 4G carrier by minimizing the impact on existing 2G services. Plan-3 is providing lowest affected traffic of 1048, 24 Erlangs, and Overall Bad Quality % of 15%. Considering the practical scenario of a telecom operator having 2G spectrum of 6.9 MHz in 1800 MHz band and who decides to rollout LTE/4G by extracting 1.4 MHz carrier from the existing spectrum resources, in left out

5.5 MHz of 1800 MHz spectrum the 12 BCCH & 15 TCH ARFCN automatic frequency assignment provides the best results in minimizing the negative impact due to cut down of existing spectrum. This will enable the operators to understand the importance of efficient use of spectrum.

REFERENCES

- [1] A R Johnson 'FREQUENCY PLANNING AND SYSTEM DESIGN OF WIDE AREA COVERAGE CELLULAR RADIO SYSTEMS ' AFRICON '92 Proceedings. 3rd AFRICON Conference Page(s): 162 - 165 Print ISBN: 0-7803-0835-2 INSPEC Accession Number: 4932789 Conference Locations: Ezulwini Valley DOI:10.1109/AFRCON.1992.624443Publisher: IEEE.
- [2] A. Gondran, o. Baala, H. Mabed and A. Caminada 'Hyper graph T-Coloring for Automatic Frequency Planning problem in Wireless LAN ' 19th International Symposium on Personal, Indoor and Mobile Radio Communications Page(s): 1 - 5 ISSN : 2166-9570 E-ISBN : 978-1-4244-2644-7 Print ISBN: 978-1-4244-2643-0 INSPEC Accession Number: 10410535 Conference Location : Cannes DOI:10.1109/PIMRC.2008.4699726Publisher: IEEE.
- [3] A. Levanti, F. Giordano, I. Tinnirello CAPWAP Architecture for Automatic Frequency Planning in WLAN 'Computers and Communications, 2007. ISCC 2007. 12th IEEE Symposium on Page(s): MW - 51 - MW - 56 ISSN: 1530-1346 E-ISBN: 978-1-4244-1521-2 Print ISBN: 978-1-4244-1520-5 Conference Location: Santiago, Portugal DOI:10.1109/ISCC.2007.4381647Publisher: IEEE.
- [4] ANDREAS EISENBLATT 'A Frequency Assignment Problem in Cellular Phone Networks ' Konrad-Zuse-Zentrum für Informationstechnik Berlin (ZI) Takustr. 7, D-14195 Berlin, Germany Preprint SC 97-27 July 10, 1997.
- [5] Andreas Eisenblatt 'Assigning Frequencies in GSM Networks ' Konrad-Zuse-Zentrum für Informationstechnik Berlin (ZI) Takustr. 7, D-14195 Berlin, Germany Volume 2002 of the series Operations Research Proceedings 2002 pp 33-40.
- [6] Ashagrie Getnet Flattie 'INTERFERENCE ANALYSIS AND REDUCTION IN CELLULAR NETWORK ' Wireless Communications and Applications (ICWCA 2012), IET International Conference on Page(s): 1 - 6 E-ISBN : 978-1-84919-550-8 INSPEC Accession Number: 13448733 Conference Location : Kuala Lumpur DOI:10.1049/cp.2012.2078 Publisher: IET.
- [7] Bruce F. McGuffin 'A Bound On Frequency Hopped GSM Performance In CO-Channel Interference ' Wireless Communication System Symposium, 1995., IEEE Page(s): 7 - 13 INSPEC Accession Number: 5404977 DOI:10.1109/WCSS.1995.588474 Publisher: IEEE.
- [8] C. Carciofi *, G. Falciasecca *, M. Fruhne **, N. P. Magnani***, V. Palestini *** 'traffic -adaptive and interference-adaptive recourse allocation schemes in GSM and DCS1800 systems under realistic traffic and

- propagation conditions: a case study. ' 0-7803-3157-5196 ,1996.
- [9] David Abajo Rica, Raquel García Pérez, Beatriz González Rodríguez 'Advanced auto-optimization and management of dual 2G/3.5G radio networks ' International Symposium on Broadband Multimedia Systems and Broadcastin Page(s): 1 - 7 ISSN : 2155-5044 E-ISBN : 978-1-4244-2591-4 Print ISBN: 978-1-4244-2590-7 INSPEC Accession Number: 10735987 Conference Location : Bilbao DOI:10.1109/ISBMSB.2009.5133735Publisher: IEEE.
- [10] Dorde Paunović, Nataša Nešković, Aleksandar Nešković 'Automatic Frequency Planning Algorithm in a Real Land Mobile Radio System Design ' Telecommunications in Modern Satellite, Cable and Broadcasting Service, 2001. TELSIKS 2001. 5th International Conference on (Volume:2) Page(s): 511 - 520 vol.2 Print ISBN: 0-7803-7228-X INSPEC Accession Number: 7225952 Conference Location : Nis DOI:10.1109/TELSKS.2001.955829Publisher: IEEE.
- [11] F. Galliano(1), N.P. Magnani(1), G. Minerva(1), A. Rolando(2), P. Zanini(3) 'GSM Frequency Planning with Band Segregation for the Broadcast Channel Carriers.
- [12] Iyad Amro ; Wassel Ghanem 'GSM Automatic Frequency Planning with the Aid of Genetic Algorithms ' Genetic and Evolutionary Computing (ICGEC), 2011 Fifth International Conference on 978-0-7695-4449-6/11 2011 IEEE DOI 10.1109 /ICGEC.
- [13] Karen I. Aardal · Stan P.M. van Hoesel · Arie M.C.A. Koster · Carlo Mannino · Antonio Sassano 'Models and solution techniques for frequency assignment problems ' ©Springer Science+Business Media, LLC 2007 Ann Oper Res (2007) 153: 79–129 DOI 10.1007/s10479-007-0178-0.
- [14] L. Narayanan, S. M. Shende 'Static Frequency Assignment in Cellular Networks ' Springer March 2001, Volume 29, Issue 3, pp 396-409.
- [15] Lei Chen 'Coverage Planning and Resource Allocation in Broadband Cellular Access ' Link'oping Studies in Science and Technology. No. 1454 Norrk'oping 2010.
- [16] M. Almgren ; M. Frodigh ; S. Magnusson ; K. Wallstedt 'Slow adaptive channel allocation for automatic frequency planning ' Universal Personal Communications, 1996. Record., 1996 5th IEEE International Conference on (Volume:1) Page(s): 260 - 264 Print ISBN: 0-7803-3300-4 DOI:10.1109/ICUPC.1996 IEEE .
- [17] Martin Grötschel 'Frequency Assignment in Mobile Phone Systems ' Konrad-Zuse-Zentrum für Informationstechnik Berlin Takustraße 7 D-14195 Berlin-Dahlem ZIB-Report 00-58 (Dezember 2000) 11. Januar 2001.
- [18] Muhammad Umair, Waleed Bin Shahid and Masab Javed Abbasi 'Automatic Frequency Planning and Optimization Algorithm for Cellular Networks ' Proceedings of the World Congress on Engineering 2012 Vol II WCE 2012, July 4 - 6, 2012, London, U.K. ISBN: 978-988-19252-1-3 ISSN: 2078-0958 (Print); ISSN: 2078-0966 (Online).
- [19] Nataša Ndković, Aleksandar NGković, prof. Dorde Pauniovit 'Automatic Frequency Planning Algorithm in a Real Land Mobile Radio System Design ' Telecommunications in Modern Satellite, Cable and Broadcasting Service, 2001. TELSIKS 2001. 5th International Conference on (Volume:2) Page(s): 511 - 520 vol.2: 19 Sep 2001-21 Sep 2001 Print ISBN: 0-7803-7228-X INSPEC Accession Number: 7225952 Conference Location : Nis DOI:10.1109/TELSK.955829 Publisher: IEEE.
- [20] Niklas Jalden and Sarah Kate Wilson 'Autonomous frequency planning for GSM networks ' telecommunications Network Strategy and Planning Symposium. NETWORKS 2004, 11th International 13-16 June 2004 Page(s): 169 - 174 Print ISBN: 3-8007-2840-0 INSPEC Accession Number: 8228842 DOI:10.1109/NETWKS.2004.1341834 Publisher: IEEE.
- [21] Oluwadamilola I. Adu, Francis E. Idachaba, and Adeyemi A. Alatishe, Members, IAENG 'Refarming 1800MHz GSM Spectrum to LTE: The Effects on Coverage Based on Pathloss Estimation ' Proceedings of the World Congress on Engineering 2014 Vol I, WCE 2014, July 2 - 4, 2014, London, U.K. ISBN: 978-988-19252-7-5 ISSN: 2078-0958 (Print); ISSN: 2078-0966 (Online).
- [22] Prof. T.venkateswarlu, K.Naresh 'AN AUTOMATIC FREQUENCY PLANNING OF GSM NETWORKS USING EVOLUTIONARY ALGORITHMS ' International Journal of Engineering Research and Applications (IJERA) Vol. 1, Issue 3, pp.626-632 ISSN: 2248-9622.
- [23] R. Barco ; F. J. Canete ; L. Diez ; R. Ferrer 'Analysis of mobile measurement-based interference matrices in GSM networks ' Vehicular Technology Conference, 2001. VTC 2001 Fall. IEEE VTS 54th (Volume:3) Page(s): 1412 - 1416 vol.3 ISSN : 1090-3038 Print ISBN: 0-7803-7005-8 INSPEC Accession Number: 7219626 Conference Location : Atlantic City, NJ DOI:10.1109/VTC.2001.956429Publisher: IEEE.
- [24] Serkan Kayacan (*), Prof. Levent Toker (**) 'Implementation of Mobile Measurement-based Frequency Planning in GSM '.
- [25] Settapong Malisuwan, Jesada Sivaraks, and Navneet Madan 'Broadband Wireless Access (BWA): Spectrum Refarming in Thailand ' International Journal of Computer and Communication Engineering, Vol. 2, No. 4, July 2013 DOI: 10.7763/IJCCE.2013.V2.224.
- [26] Su Chao ; Lan Lina ; Yu Cuibo ; Gou Xuerong 'A new method of frequency planning for new cells in GSM ' Environmental Science and Information Application Technology (ESIAT), 2010 International Conference on (Volume:3) Page(s): 420 - 423 Print ISBN: 978-1-4244-7387-8 INSPEC Accession Number: 11526045 Conference Location : Wuhan DOI:10.1109/ESIAT.2010.5568326 Publisher: IEEE.
- [27] Xingqin Lin and Harish Viswanathan 'Dynamic Spectrum Refarming of GSM Spectrum for LTE Small Cells ' INTERNATIONAL JOURNAL OF COMMUNICATION SYSTEMS arXiv:1305.2999v1 [cs.IT] 14 May 2013.

- [28] Xuemin Huang', Ulrich Behr² and Werner Wiesbeck'
'Automatic Base Station Placement and Dimensioning
for Mobile Network Planning ' Vehicular Technology
Conference, 2000. IEEE-VTS Fall VTC 2000. 52nd
(Volume: 4) Page(s): 1544 - 1549 vol.4 Meeting Date:
ISSN: 1090-3038 Print ISBN: 0-7803-6507-0 INSPEC
Accession Number: 6886821 Conference Location:
Boston, MA
DOI:10.1109/VETEFCF.2000.886090Publisher: IEEE.
- [29] Y. Timmer ; M. Bergenlid 'Estimating the inter cell
dependency matrix in a GSM network ' Vehicular
Technology Conference, 1999. VTC 1999 - Fall. IEEE
VTS 50th (Volume: 5) page 3024 - 3028 vol.5 ISSN:
1090-3038 Print ISBN: 0-7803-5435-4 INSPEC
Accession Number: 6521060 Conference Location:
Amsterdam DOI:10.1109/VETEFCF.1999.800342 IEEE.
- [30] Yu Gao ; Jingqun Song ; Qixun Zhang ; Yunfei Ma 'A
novel interference matrix generation algorithm in GSM
networks ' Communications and Networking in China,
2009. China COM 2009. Fourth International
Conference on Page(s): 1 - 5 E-ISBN: 978-1-4244-
4337-6 Print ISBN: 978-1-4244-4337-6 INSPEC
Accession Number: 10985094 Conference Location:
Xian
DOI:10.1109/CHINACOM.2009.5339733Publisher:
IEEE.
- [31] Zhouyun Wu, Aiping Huang[†], Haojie Zhou, Cunqing
Hua and Jun Qian 'Data Fusion Based Interference
Matrix Generation for Cellular System Frequency
Planning ' INTERNATIONAL JOURNAL OF
COMMUNICATION SYSTEMS, VOL. XX, NO. Y,
MONTH 2010 arXiv:1011.2879v2 [cs.NI] 7 Mar 2011.
- [32] Atoll Wireless network Engineering Software Version
3.2 Febuary 2013- Geo Data courtesy of EGS
Technology and geoimage.
- [33] Information Memorandum Auction of Spectrum in
1800mhz and 800 mhz Band Government of India
Ministry of Communication and Information
Technology Department of Telecommunication 27th
August 2012.
- [34] Magdaleen Snyman Cell and Frequency Planning,
Cellular Network Planning- CE at Up 1/31/2008 1 may
2004.
- [35] Nokia Network Optimization Mobile Broadband
Performance by Spectrum Reframing.
- [36] Ultima Fort Schema GSM Optimization Algorithm
Overview.
- [37] GSM system engineering by Asho Mehrotra.
- [38] Mentum – Planet AFP tool