

Conservation of Wind Energy using Z-Source Matrix Converter

B.Vaikundaselvan, Dr.R.Dhanasekaran, G.Jegan, N.Prakash,
vaikungth@yahoo.co.in,rdhanasekar@yahoo.com jeg1975@rediffmail.com
prakashnarayanasamy@yahoo.com

Abstract— The growth of wind energy conversion system for domestic applications has various technologies developed for them. This paper proposes a novel Z-source buck-boost matrix converter structure and a switching technique for unity voltage transfer ratio. The conventional matrix converter is well known for its advantages over a DC-linked back-to-back. The converter can buck and boost with step-changed frequency, and both the frequency and the voltage can be stepped up or stepped down. In addition, the converter employs a safe-commutation strategy to conduct along a continuous current path, which results in the elimination of voltage spikes on switches without the need for a snubber circuit. With the use of matrix converter the need for rectifier circuit and passive components to store energy are reduced. The operating principles of the proposed single-phase Z-source buck-boost matrix converter are described. A simulation of the overall system is carried out and theoretical calculations and feasibility of the proposed topology are verified and that the converter can produce an output voltage with three different frequencies 100, 50, and 13.5 Hz, and that the amplitude of the output voltage has been bucked and boosted.

Index Terms— Maximum power point tracking (MPPT) control, Buck-boost voltage, single-phase matrix converter, Z-source converter, permanent-magnet synchronous generator (PMSG).

I. INTRODUCTION

Wind Turbines usage as sources of energy has increased significantly in the world. With growing application of wind energy conversion systems (WECS), various technologies are developed for them. With numerous advantages, permanent-magnet synchronous generator (PMSG) generation system represents an important trend in development of wind power applications [1]-[5] to realize these objectives; the ac-ac converter is one of the best topology for Wind Energy Conversion system.

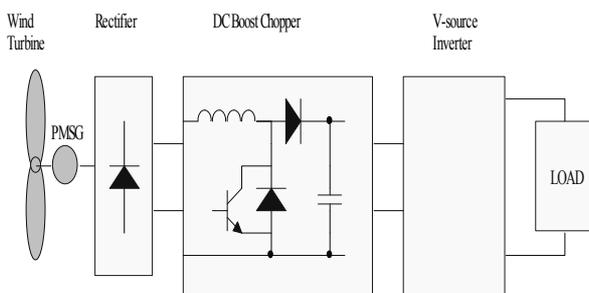


Fig.1. Conventional PMSG-based WECS with Z-Source Inverter

Figure.1 shows a conventional configuration of AC-DC-AC topology for PMSG. This configuration includes diode

rectifier, boost DC-DC converter and inverter. In this topology, boost converter is controlled for maximum power point tracking (MPPT) and converter is controlled to deliver high-quality power.

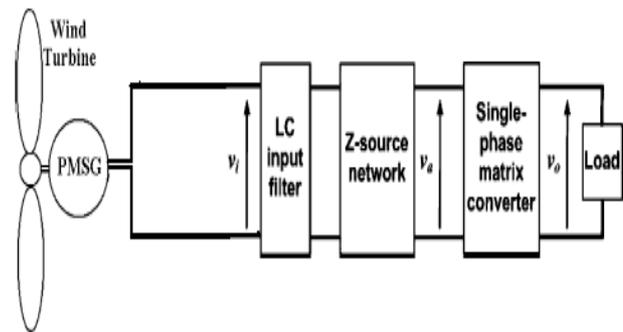


Fig.2. General Block diagram of the proposed Topology

The Z-source matrix converters have been reported recently as a competitive alternative to existing inverter topologies with many inherent advantages such as voltage boost [13]. This inverter facilitates voltage boost capability with the turning ON of both switches in the same inverter phase leg (shoot-through state). In this paper, a new PMSG-based WECS with Z-source matrix converter is proposed. The proposed Z-source matrix converter topology is shown in Figure.2. With this topology, reliability of the system is greatly improved and converter output power distortion is reduced. Section II of this paper introduces Z-source matrix converter and describes operation of the Z-source matrix converter. Then, power delivery and MPPT control of system are explained. Finally, simulation results are presented to verify the voltage and current performance of the proposed system for 12.5 Hz, 50 Hz and 100 Hz.

II. Z-SOURCE INVERTER

A MATRIX converter is an ac-ac converter that can directly convert an ac power supply voltage into an ac voltage of variable amplitude and frequency without a large energy storage element. In 1980, Venturini and Alesina presented the first algorithm capable of synthesizing output Sinusoidal reference voltages from a balanced three-phase voltage source connected to the converter input terminals. Recent research on matrix converters has focused mainly on modulation schemes and on ac drive applications. The first study of a single-phase matrix converter was performed by Zuckerberger on a frequency step-up and fundamental voltage step-down converter. The research in [6] - [8] focused on step-up/step down frequency operation with a

safe-commutation strategy. Applications of single-phase matrix converters have been described for induction motor drives, radio-frequency induction heating, audio power amplification, and compensation voltage sags and swells [9] - [11]. It has been reported that the use of safe-commutation switches with pulse width modulation (PWM) control can significantly improve the performance of ac-ac converters [12]. However, in the conventional single-phase matrix converter topology, the ac output voltage cannot exceed the ac input voltage. Furthermore, it is not possible to turn both bidirectional switches of a single-phase leg on at the same time; otherwise, the current spikes generated by this action will destroy the switches. These limitations can be overcome by using Z-source topology [13]. Research on Z-source converters has focused mainly on dc-ac inverters and ac-ac converters. Recently, the work on Z-source DCAC inverters has focused on modeling and control, the PWM strategy, applications, and other Z-network topologies. The Z-source ac-ac converters focus on single-phase topologies and three-phase topologies [6] and [13]. In applications where only voltage regulation is needed, the family of single-phase Z-source ac-ac converters proposed has a number of merits, such as providing a larger range of output voltages with the buck-boost mode, reducing inrush, and harmonic current. However, no one has designed a converter based on a Z-source structure and a matrix converter topology that can provide ac-ac power conversion with both a variable output voltage and a step-changed frequency. In this paper, we apply the Z-source concept to a single-phase matrix converter to create a new type of converter called a single-phase Z-source buck-boost matrix converter [14] - [16]. In contrast to the existing single-phase PWM ac-ac converters, this proposed single-phase Z-source buck-boost matrix converter can provide a wide range of output ac voltages in buck-boost mode with step-up/step-down frequencies.

The result has been shown by operating principles, analyses, simulation, and experimental results that the proposed single-phase Z-source buck-boost matrix converter can buck and boost voltages in step-up/step-down frequency operation [8] and [17]. We use a safe-commutation technique that is very simple to implement as a free-wheeling path to provide the required free-wheeling operation similar to what is available in other converter topologies [6]. The safe-commutation scheme establishes a continuous current path in dead time to eliminate voltage spikes on switches without a snubber circuit. We also performed a participative simulation integral manufacturing (PSIM) simulation. Both the simulation and experimental results show that the output voltage can be obtained at three different frequencies-100, 50, and 12.5 Hz-and in the buck-boost amplitude mode. Thus, the proposed single-phase Z-source buck-boost matrix converter can be used for voltage applications that require step-changed frequency or amplitude. In particular, it can be applied to the starting of an asynchronous motor as well as to the speed control of an induction motor, which needs a step-changed speed.

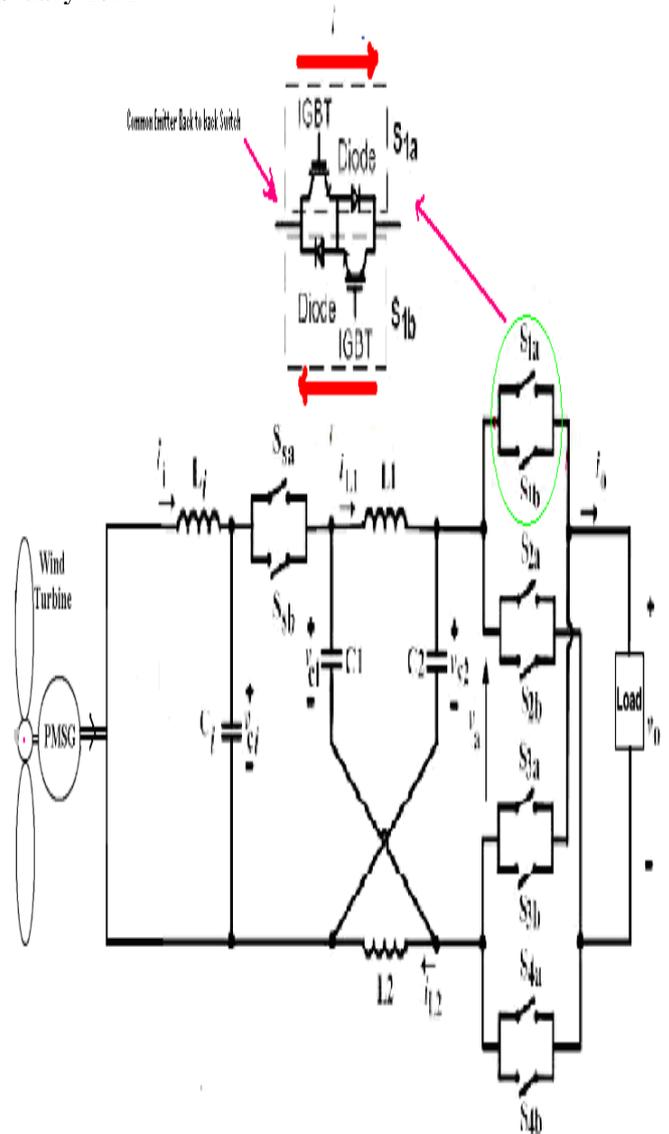


Fig.3. Proposed single-phase Z-source matrix Converter topology

III. SINGLE-PHASE MATRIX CONVERTER (SPMC)

The SPMC topology with its 4 bi-directional switches and its individual power switches are as shown in Figure.4 and Figure.5 respectively; each capable of conducting current in both directions, blocking forward and reverse voltages [14]-[15]. Theoretically the switching sequence in the SPMC must be instantaneous and simultaneous; unfortunately impossible for practical realization due to the turn-off IGBT characteristic, where the tailing-off of the collector current will create a short circuit with the next switch turn-on. This problem occurs when inductive loads are used. A change in current due to switch commutation and PWM switching will result in two damaging phenomena. First current spikes will be generated in the short-circuit path and secondly voltage spikes will be induced as a result of change in current direction across the inductance. Both will subject the switches with undue stress leading to destruction. A systematic switching sequence is hence required that lengthens the dead

time between conduction of each IGBT's in SPMC so as to allow for a complete turn-off prior to the next switching sequence. This is to minimize development of spikes as described. In conventional converter this is normally implemented in the form of free-wheeling diodes as shown in Figure.5. In SPMC a switching algorithm strategy need to be developed that will be described subsequently. Figure 4& 5 are shown in Appendix.

IV. PROPOSED TOPOLOGY

Figure 2 shows a block diagram of the proposed topology. The ac voltage across the single-phase matrix converter V_a is boosted by the ac-ac Z-source converter with ac input voltage v_i . Then, the single-phase matrix converter modulates the frequency of V_a . The output voltage V_o is obtained with a step changed frequency and a variable amplitude. Figure.3 shows the proposed single-phase Z-source buck-boost matrix converter. It employs an LC input filter; a Z-source network, bidirectional switches, and an RL load. The LC input filter is required to reduce switching ripple included in input current. All the inductors and capacitors are small and are used to filter switching ripples. The symmetrical Z-source network, a combination of two inductors and two capacitors, is the energy storage/filtering element for the single-phase Z-source buck-boost matrix converter. Since the switching frequency is much higher than the ac source (or line) frequency, the requirements for the inductors and capacitors should be low. As shown in Figure.3, the proposed single-phase Z-source buck-boost matrix converter requires four bidirectional switches S_{1j} , S_{2j} , S_{3j} , and S_{4j} ($j = a, b$) to serve as a single-phase matrix converter and one source bidirectional switch S_{sj} ($j = a, b$), where a and b refer to drivers 1 and 2, respectively. All bidirectional switches are common emitter back-to-back switch cells. The five switches S_{sj} , S_{1j} , S_{2j} , S_{3j} , S_{4j} ($j=a, b$) used in the single-phase Z-source buck-boost matrix converter are bidirectional switches, as shown in Figure. 4 and Figure.5. The bidirectional switches are able to block voltage and conduct current in both directions. Because these bidirectional switches are not available at present, they can be substituted for by combinations of two diodes and two insulated gate bipolar transistors (IGBTs) connected in anti parallel(common emitter back to back), as shown in Figure.5. The diodes are included to provide the reverse blocking capability.

Because of the high switching Capabilities and their high current-carrying capacities IGBT's are used for switches, which are desirable for high-power applications. As indicated in the Figure.4, D refers to the equivalent duty ratio and T is the switching period. Implementing the single-phase Z-source buck-boost matrix converter requires different bidirectional switching arrangements depending on the desired amplitude and frequency of the output voltage. The amplitude of the output voltage is controlled by the duty ratio D , while the frequency of the output voltage depends on the switching strategy.

In this paper, the frequency of input voltage f_s is assumed to be 50 Hz, and the desired output frequency f_o is synthesized to be 100 Hz (step-up frequency), 50 Hz (same frequency), or 12.5 Hz (step-down frequency). For example, Figure.3 illustrates the converter's switching strategy over one cycle of input voltage for a 100-Hz output frequency in boost mode to double output frequency of the input voltage, the operation of the converter is divided into four stages, as shown in the Figure. 6. Figure. 6 illustrate stage 1 in the boost mode when both input voltage and output voltage are positive. The switches S_{sa} , S_{1a} , S_{2b} , and S_{4a} are fully turned on (S_{2b} is turned on for commutation purposes, while S_{sa} and S_{4a} are turned on for continuous current flow); S_{1b} , S_{3b} , and S_{4b} are modulated complementary to the dead time. In state 1, as shown in Figure.6(a), S_{4b} turns on and conducts current flow during the increasing positive cycle of input voltage; S_{sb} and S_{1b} turn on and conduct negative current flow from the load to the source, if possible; S_{2b} turns on for commutation purposes. Then, S_{sb} and S_{4b} turn off, and S_{3b} has not yet turned on, and there are two commutation states that occur. If $iL_1 + iL_2 + i_o > 0$, the current flows along a path from S_{sa} , as shown in Figure. 6(b); if $-iL_1 - iL_2 + i_o > 0$, the current flows along a path from S_{4a} and S_{2b} , as shown in Figure. 4(c). As shown in Figure. 6(c), the path of the current flowing through S_{2b} is $-iL_1 - iL_2 + i_o$. Because switch S_{2b} must be conducting, the current condition for this state is $-iL_1 - iL_2 + i_o > 0$. In state 2, as shown in Figure.6 (d), S_{3b} turns on and conducts current flow in the Z-source network as a hoot-through path; the positive load current may be freewheeled through S_{2b} and S_{1a} ; the negative load current may be freewheeled through S_{3b} and S_{4a} . In these switching patterns, the current path is always continuous whatever the current direction. Thus, the voltage spikes are eliminated during switching and commutation processes. The analysis for stages 2, 3, and 4 is similar to that for stage 1. The dotted line in Figure.6 indicates the safe-commutation switch during each particular stage. The operations at the other output frequencies of 50 and 12.5 Hz are performed by changing the switching strategies. The operation for an output frequency of 50 Hz is implemented by omitting stage 2 and stage 3 and doubling the time intervals for stage 1 and stage 4. Similarly, the operation for an output frequency of 12.5 Hz is implemented by interchanging stage 2 and stage 3 and doubling the time intervals of all stages. In the operations for output frequencies of 50 and 12.5 Hz, the time interval of each stage is 8.33 ms.

V. CIRCUIT EQUATIONS

Ignoring the effects of dead time, the single-phase Z-source buck-boost matrix converter has two operating states in one switching period: state 1 and state 2, as shown in Figure. 6. as shown in Figure. 6(a), the time interval in state 1 is $(1-D) T$, where D is the equivalent duty ratio and T is the switching period. Thus the voltage across the capacitor of the Z-network is

$$V_a(t) \approx v_{C1}(t) = v_{C2}(t) = \frac{1-D}{1-2D} v_i(t) \quad (1)$$

The amplitude of the voltage across the single-phase matrix converter can be calculated as

$$V_{am} = \sqrt{2} V_a = \frac{1-D}{1-2D} \sqrt{2} V_i \quad (2)$$

Where V_a and V_i are, respectively, the rms value of the voltage across the single-phase matrix converter and the input voltage. The rms value of the fundamental voltage across the load is calculated according to the amplitude of the voltage across the Single-phase matrix converter.

$$i.e. V_o = \frac{V_{am}}{\sqrt{2}} \quad (3)$$

The voltage gain K can be defined as

$$K = \frac{V_o}{V_i} = \frac{1-D}{1-2D} \quad (4)$$

$$V_i = 1 - 2D$$

Where V_i and V_o are, respectively, the rms value of input voltage and output voltage. The proposed single-phase Z-source buck-boost matrix converter has two operation regions. When $D < 0.5$, the single-phase Z-source buck-boost matrix converter operates in boost mode, and when $D > 0.66$, the single-phase Z-source buck-boost matrix converter operates in buck mode. Figure 6 is shown in Appendix.

VI. SIMULATION RESULTS

The PSIM simulation results have been provided in order to verify the properties described before for the proposed single-phase Z-source buck-boost matrix converter. The simulation parameters have been selected such as LC input filter, Z-source network, and load to be $L_i = 0.1$ mH, $C_i = 6.8$ μ F, $L_1 = L_2 = 1$ mH, $C_1 = C_2 = 1$ μ F, $R = 100$ Ω , and $L_f = 3$ mH. The switching frequency was set to 20 kHz, and the dead time for commutation at 0.5 μ s. The input voltage was 40 Vrms/50 Hz, and the output voltage was 65 Vrms with $D = 0.3$ in boost mode.

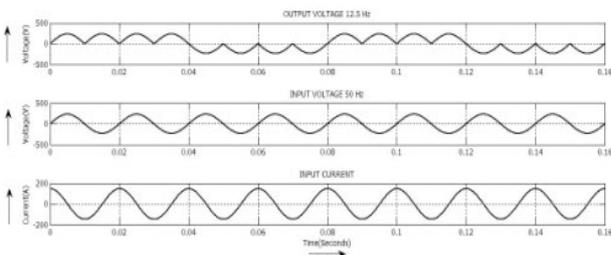


Fig.7. Simulink /MATLAB simulation results, input current and input voltage for 12.5 Hz

Figures. 7–10 shows the simulation results for the proposed single-phase Zsource buck-boost matrix converter in boost mode with $D = 0.3$ at output frequencies of 100, 50, and 12.5 Hz, respectively. As shown in Figure.6, when $D = 0.3$, the output voltage is boosted to about $V_o = 65$ Vrms from an input voltage of 40 Vrms. In addition, the output frequency is modulated to either 100 Hz (step-up frequency), 50 Hz (the same frequency), or 12.5 Hz (step-down frequency) from the input frequency of 50 Hz.

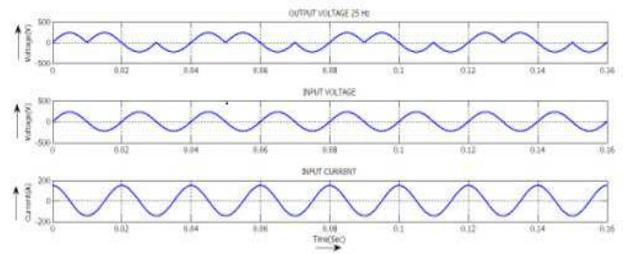


Fig.8.Simulink /MATLAB simulation results, Output current and output voltage for 25 Hz

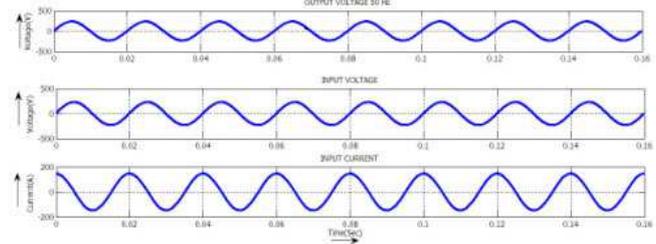


Fig.9. Simulink /MATLAB simulation results, Output current and output voltage for 50 Hz

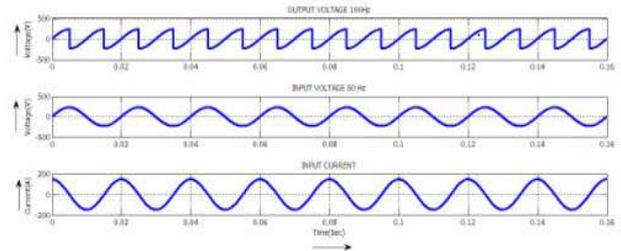


Fig.10. Simulink /MATLAB simulation results, Output current and output voltage for 100 Hz

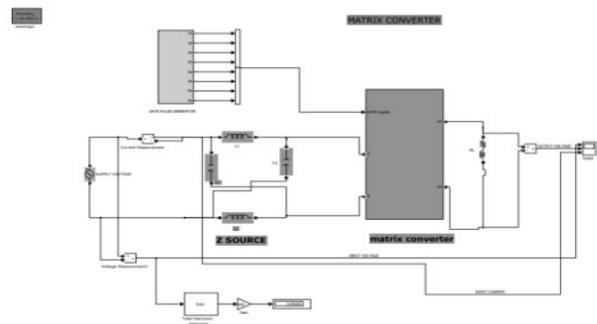


Fig.11.Simulation scheme for the single phase matrix converter

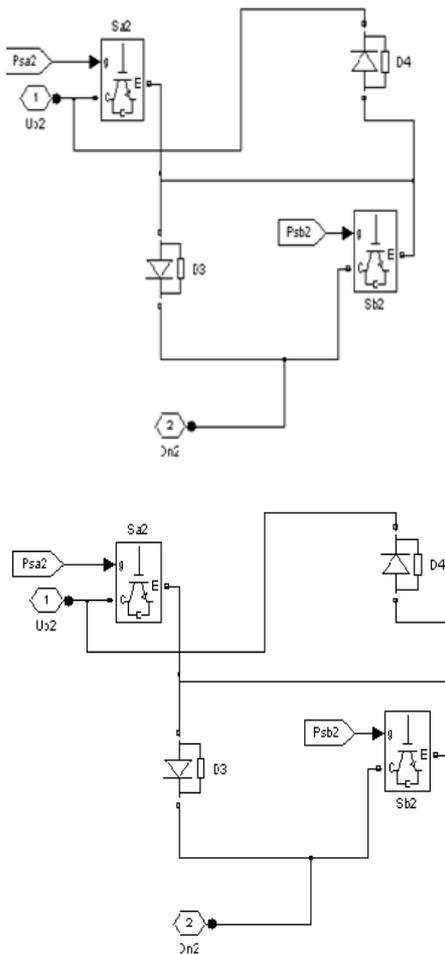


Fig.12. Simulation scheme for switch control

VII. CONCLUSION

In this paper, a new single-phase Z-source buck–boost matrix converter has been prepared for the domestic windmill applications. It can buck and boost to the desired output voltage with step-changed frequency. The output of this single-phase Z-source buck–boost matrix converter produces the voltage in buck–boost mode with a step-changed frequency, in which the output frequency is either an integer multiple or an integer fraction of the input frequency. It also provides a continuous current path by using a commutation strategy. The use of this safe-commutation strategy is a significant improvement as it makes it possible to avoid voltage spikes on the switches without the use of a snubbed circuit. A steady-state circuit analysis has been presented and described the operational stages. PSIM simulation has been used to verify the performance of the proposed converter. The simulation and the experimental results with a passive RL load showed that the output voltage can be produced at three different frequencies, 100, 50, and 12.5 Hz, and in the buck–boost amplitude mode. The proposed converter is particularly suitable for controlling the windmill voltage without the use of an inverter because for these applications, the input voltage frequency must be changed to control their speed by stages.

REFERENCES

- [1] A New Variable-Speed Wind Energy Conversion System Using Permanent-Magnet Synchronous Generator and Z-Source Inverter Seyed Mohammad Dehghan, Student Member, IEEE, Mustafa Mohamadian, Member, IEEE, and Ali Yazdian Varjani, Member, IEEE .
- [2] N. Yamamura, M. Ishida, and T. Hori, “A simple wind power generating system with permanent magnet type synchronous generator,” in Proc.IEEE Int. Conf. Power Electron. Drive Syst., 1999, vol. 2, pp. 849–854.
- [3] T. Tafticht, K. Agbossou, A. Cheriti, and M. L. Doumbia, “Output power maximization of a permanent magnet synchronous generator based standalone wind turbine,” in Proc. IEEE ISIE 2006, Montreal, QC, Canada,pp. 2412–2416.
- [4] A. M. Knight and G. E. Peters, “Simple wind energy controller for an expanded operating range,” IEEE Trans. Energy Convers., vol. 20, no. 2,pp. 459–466, Jun. 2005.
- [5] Permanent magnet generators applied to variable-speed wind-energy systems connected to the grid,” IEEE Trans. Energy Converters., vol. 21, no. 1, pp. 130–135, Mar. 2006.
- [6] Z. Idris, M.K. Hamzah, M.F. Saidon, “Implementation of Single-Phase Matrix Converter as a Direct AC-AC Converter with Commutation Strategies”; 37th IEEE Power Electronics Specialists Conference, 2006. PESC06. 18-22 June 2006 Page(s):1 – 7.
- [7] Minh-Khai Nguyen, Student Member, IEEE, Young-Gook Jung, Young-Cheol Lim, Member, IEEE, and Young-Min Kim “A Single-Phase Z-Source Buck–Boost Matrix Converter,” IEEE Transactions on power electronics, vol. 25, no. 2, February 2010.
- [8] Minh-Khai Nguyen, Young-Gook Jung, and Young-Cheol Lim “Single-Phase AC/AC Buck-Boost Converter with Single-Phase Matrix Topology”.
- [9] N. Nguyen-Quang, D. A. Stone, C.M. Bingham, andM. P. Foster, “Single phase matrix converter for radio frequency induction heating,” in Proc.SPEEDAM 2006, pp. S18-28–S18-32.
- [10] I. Sato, J. Itoh, H. Ohguchi, A. Odaka, and H. Mine, “An improvement method of matrix converter drives under input voltage disturbances,” IEEE Trans. Power Electron., vol. 22, no. 1, pp. 132–138, Jan. 2007.
- [11] T.-H. Liu, D.-F. Chen and C.-K. Hung, “Nonlinear controller design and implementation for a matrix-converter-based PMSM drive system”, IEE Proc.-Electr. Power Appl., Vol. 152, No. 5, September 2005.
- [12] Z. Idris, M. K. Hamzah, and M. F. Saidon, “Implementation of singlephase matrix converter as a direct ac-ac converter with commutation strategies,” in Conf. Rec. IEEE PESC 2006, pp. 2240–2246.
- [13] H.M.Hanafi, N.R. Hamzah, A.Saparon and M.K.Hamzah, Senior Member, IEEE, Improved Switching Strategy of Single-Phase Matrix Converter as a Direct AC-AC Converter, 978-1-4244-1718-6/08©2008 IEEE.
- [14] A. Zuckerberger, D.Weinstock, and A. Alexandrovitz, “Single-phase matrix converter,” in Proc. Inst. Electr. Eng. Electric Power Appl., 1997,vol. 144, pp. 235–240.

[15] Mohammad Noor, Siti Zaliha; Hamzah, Mustafar Kamal; Baharom, Rahimi; Dahlan, Nofri Yenita; "A New Single-Phase Inverter with Bidirectional Capabilities Using Single-Phase Matrix Converter", IEEE Power Electronics Specialists Conference, 2007. PESC 2007, 17-21 June 2007, Page(s): 464 – 470.

[16] R. Baharom, A.S. A. Hasim, M. K. Hamzah, Member, IEEE, M. F. Omar, "A New Single-Phase Controlled Rectifier Using Single-Phase Matrix Converter", First International Power and Energy Conference PECon 2006 453 November 28-29, 2006, Putrajaya, Malaysia.

[17] R. Baharom, Student Member, IEEE, M.K. Hamzah, Senior Member, IEEE, K.S. Muhammad and N.R. Hamzah, "Boost Rectifier Using Single-Phase Matrix Converter", 978-1-4244-1718-6/08©2008 IEEE.

[18] Melicio R, Mendes VMF, Catalão JPS. Two-level and multilevel converters for wind energy systems: a comparative study. In: Proc. 13th Int. Power Electron. Motion Control Conf., Poznan, Poland; 2008. p. 1682–7.

[19] Baroudi JA, Dinavahi V, Knight AM. A review of power converter topologies for wind generators. *Renew Energy* 2007;32 (14):2369–85.

[20] Gaillard A, Poure P, Saadate S, Machmoum M. Variable speed DFIG wind energy system for power generation and harmonic current mitigation. *Renew Energy* 2009; 34 (6):1545–53.

[21] Fernandez LM, Garcia CA, Jurado F. Operating capability as a PQ/PV node of a direct-drive wind turbine based on a permanent magnet synchronous generator. *Renew Energy* 2010; 35(6):1308–18.

[22] Ramtharan G, Jenkins N, Anaya-Lara O, Bossanyi E. Influence of rotor structural dynamics representations on the electrical transient performance of FSIG and DFIG wind turbines. *Wind Energy* 2007; 10:293–301.

Electronics & Drives from College of Engineering, Anna University, Guindy, Chennai and Ph.D in Electrical Engineering from Anna University, Chennai. He is currently working as a Professor & Director, Syed Ammal Engineering College, Ramanathapuram. His research interest include EMI/EMC, Power Engineering and Control of Special machines



G. Jegan received the B.E. Degree in Electrical and Electronics Engineering from Coimbatore Institute of Technology and affiliated to Bharathiyar University, Coimbatore, India. He received the M.E. Degree in Electrical Machines from PSG College of Technology, Coimbatore and affiliated to Anna University Chennai, India. He is currently working as an Assistant Professor of Electrical and Electronics Engineering at Kathir College of Engineering, Coimbatore, India. He has been responsible for the development of Electrical Machines and Power Electronics Laboratories. His fields of interest include power quality, power supplies, energy audit in the electrical system. He had more than 10 years of industry experience in the field of electro mechanical installation out of which two years as the Project Manager Electrical (R&D) in Doha, Qatar.



N. Prakash received the B.E. from Government College of Technology, Coimbatore and M.E. degrees from PSG College of Technology, Coimbatore, Tamil Nadu, India. both in Electrical Engineering and the M.B.A. degree from TNOU Chennai, India. Where he is engaged in research in the fields of power electronics, power quality, and electric power systems. Now he is working in Kumaraguru college of Technology, Coimbatore, India as Assistant Professor in the department of Electrical and Electronics Engineering.

AUTHOR BIOGRAPHY



B. Vaikundaselvan received the B.E. Degree in Electrical and Electronics Engineering from Government College of Technology, Coimbatore and affiliated to Bharathiyar University, Coimbatore, India. He received the M.E. Degree in Electrical Machines specialization from PSG College of Technology, Coimbatore and affiliated to Anna University Chennai, India. He is currently working as an Associate Professor of Electrical

and Electronics Engineering department at Kathir College of Engineering, Coimbatore, India. His area of interest is Electric drives and its controls, Design of control system, energy audit in the electrical system and non conventional energy conservation. He had more than 18 years of experience in the field of industry and Teaching. He has been the life member for Indian Society for Technical Education.



Dr. R. Dhanasekaran received the B.E degree in Electrical & Electronics Engineering from Bharathiyar University, Coimbatore, M.E. degree in Power

APPENDIX

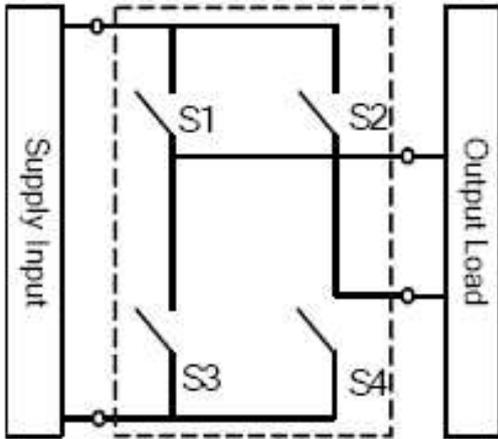


Fig.4. SPMC circuit configuration

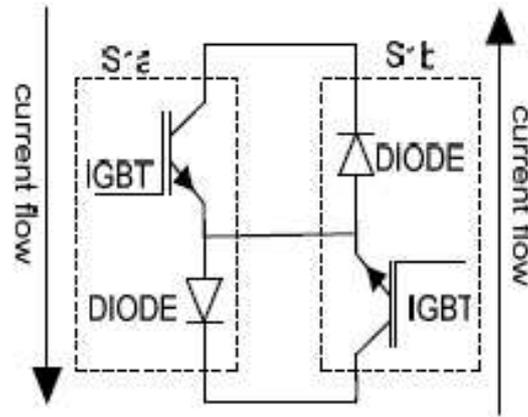


Fig.5. Bi-directional switch module (common emitter Configuration)

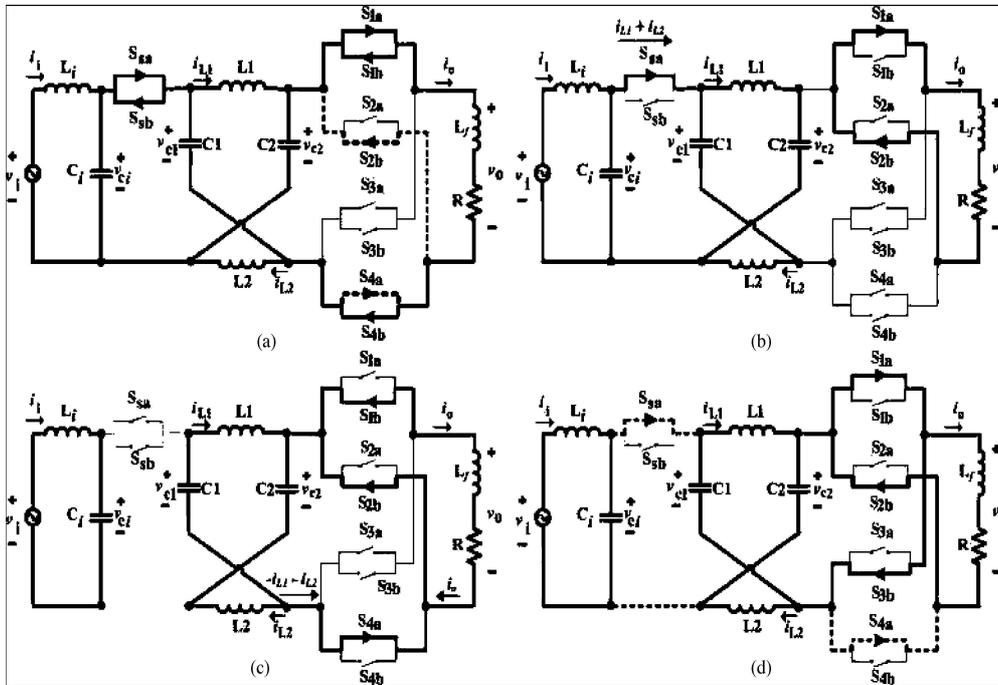


Fig.6 Stage 1 for the boost mode for a frequency of 100 Hz. (a) State 1. (b) Commutation state when $iL1 + iL2 + io > 0$ (c) Commutation state when $-iL1 - iL2 + io > 0$ (d) State 2.