

Determination of Base Shear and Displacement for Multi-Storey Building with Different Location of Shear Wall Using STAAD.Pro

Aliya W.Khan and S.D. Charkha

Aliya W. Khan Post Graduate Student in Structural Engineering, Babasaheb College of Engineering, Pusad (M.S.)

S.D. Charkha, Associate Professor, Civil Engineering Dept, Babasaheb College of Engineering, Pusad (M.S.)

Abstract--- Shear wall systems are one of the most commonly used lateral load resisting in high rise building. Shear wall has high in plane stiffness and strength which can be used to simultaneously resist large horizontal loads and support gravity loads. Incorporation of shear wall has become inevitable in multi-storey building to resist lateral forces .It is very necessary to determine effective ,efficient and ideal location of shear wall. In this paper, study of 25 storey building in zone V is presented with some preliminary investigation which is analyzed by changing various position of shear wall with for determining parameters like bending moment ,base shear and roof displacement. This analysis is done by using standard package STAAD. Pro.

Keywords--- Shear Wall, Lateral Loading, Displacements, Forces, Moments.

I. INTRODUCTION

RC multi-storey buildings are adequate for resisting both the vertical and horizontal load. When such building is designed without shear wall , beam and column sizes are quite heavy and there is lot of congestion at these joint and it is difficult to place and vibrate concrete at these places and displacement is quite heavy which induces heavy forces in member. Shear wall may become imperative from the point of view of economy and control of lateral deflection.

In RC multi-storey building lift well or shear wall are usual requirement. Centre of mass and stiffness of the building is ideal for a structure. However, on many occasions the design has to be based on the off centre position of lift and stair case wall with respect to centre of mass which results into an excessive forces in most of the structural members, unwanted torsional moment and deflection.

II. STRUCTURAL DATA

Building consists of 7 bays of 7.5M in X- direction and 5 bays of 6.5M in Y- direction.

Table 1: Shows the Structural Data of Building

Zone	V
Height of storey	3.35 m

Number of storeys	25
	600mm from base to storey Level 10
	400 mm from storey level 10 to 20
Shear wall thickness	
	230 mm from storey level 20 to 25
Grade of concrete and steel	M20 and Fe 415
Depth of slab	175 mm
Size of beam in longitudinal and transverse direction	400 x 600 mm
	850 x 850 mm From Base to Storey level 13
	750 x 750 mm From Storey level 13 to 16
	650 x 650 mm From Storey level 16 to 19
Size of Column	550 x 550 mm From Storey level 19 to 22
	450 x 450 mm From Storey Level 22 to 25
	Column around periphery 600 x 600 mm

III. GRAVITY LOADING

Gravity loading consists of dead load due to structural self-weight.

- i. Live load is considered as 3 KN per Square meter.

IV. LATERAL LOADING

Lateral loading consist of earthquake loading which has been calculated by program and it has been applied to the mass centre of the building.


- ii. Period Calculation: Users defined
- iii. Response Reduction factor (R): 5

V. RESULTS AND DISCUSSION

Results obtained from the analysis are recorded in tabular form for the five cases of the building separately for comparison

of base shear and displacement.

- i. Case no. 1 When Shear wall (Lift core) is placed at centre of building
- ii. Case no. 2 When Shear wall (Lift core) is displaced 7.5m from the centroid in X-direction.
- iii. Case no. 3 When Shear wall (Lift core) is displaced 15 m from the centroid in X-direction.
- iv. Case no. 4 When Shear wall (Lift core) is displaced 22.5 from the centroid in X-direction.

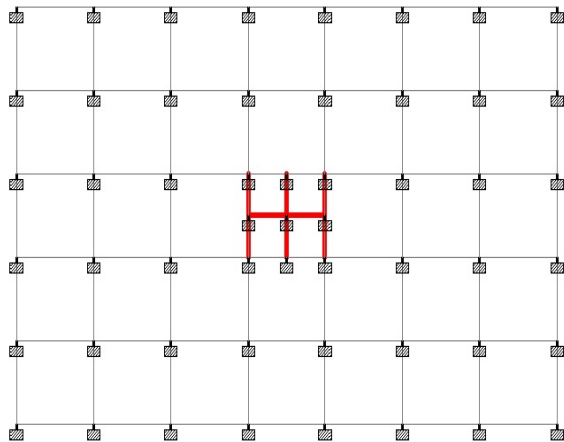

Plan of the Building

Table 2: Case No. 01 Deflection at Roof when Shear Wall (Lift Core) at Centre

Load combination	Deflection in mm (X direction)	Deflection in mm (Z direction)
1.2(DL+LL+EQ)	64.93	74.744
1.5(DL+EQ)	83.629	94.858

Table 3: Case No. 01 Base Shear when Shear Wall (Lift Core) at Centre

Load combination	Base Shear (KN) X direction	Base Shear (KN) Z direction
1.2(DL+LL+EQ)	4284	4424
1.5(DL+EQ)	3866	3866

Table 4: Case No. 02 Base Shear when Shear Wall (Lift Core) Placed at Second Position

Load combination	Base Shear (KN) X direction	Base Shear (KN) Z direction
1.2(DL+LL+EQ)	3677.35	3303.61
1.5DL+1.5EQ	3771.88	5319.53

Table 5: Case No. 02 Deflection at Roof when Shear Wall (Lift Core) at Second Position

Load combination	Deflection In mm (X direction)	Deflection in mm (Z direction)
1.2(DL+LL+EQ)	83.46	0
	0	74.60
1.5DL+1.5EQ	108	0
	44	93.58

Table 6: Case No. 03 Base Shear when Shear Wall (Lift Core) Placed at Third Position

Load combination	Base Shear (KN) X direction	Base Shear (KN) Y direction
1.2(DL+LL+EQ)	3961.93	3646.39
1.5DL+1.5EQ	3961	3825.59

Table 7: Case No. 03 Deflection at Roof when Shear Wall (Lift Core) at Third Position

Load combination	Deflection In mm (X direction)	Deflection In mm (Z direction)
1.2(DL+LL+EQ)	56.08	0
1.2(DL+LL+EQ)	91	57.52 & 60.27
1.5DL+1.5EQ	31.58	138

Table 8: Case No. 04 Base Shear when Shear Wall (Lift Core) Placed at Fourth Position

Load combination	Base Shear (KN) X direction	Base Shear (KN) Z direction
1.2(DL+LL+EQ)	3962.84	3963.25
1.5DL+1.5EQ	4643.26	4643

Load combination	Deflection in mm (X direction)	Deflection in mm (Z direction)
	69.709	0
1.2(DL+LL+EQx)	92.575	0
0.9DL+1.5EQ	38.087	138.91
1.5DL+1.5EQ		

Table 9: Case No. 04 Deflection at Roof when Shear Wall (Lift

Core) at Forth Position

VI. CONCLUSION

From preliminary investigation, it reveals that the significant effects on deflection in orthogonal direction and base shear by shifting the shear wall location. Placing Shear wall away from

Centre of gravity resulted in increase in most of the members forces. It may be observed from tables no 2 and table no 4 that displacement of the building floor at storey 25 has been reduced due to presence of shear wall placed at centre. From the table no. 6, 8 and 10, as the eccentricity increases in X-direction, the lateral force in Y- direction develop the deflection in both direction. From the table of Base shear, Base shear in Y- direction increases with increase in eccentricity. The displacement of building is uni-directional and uniform for all the grids in the case of Zero eccentricity for seismic loading. With the increase in eccentricity, the building shows non-uniform movement of right and left edges of roof due to torsion and induces excessive moment and forces in member.

REFERENCES

- [1] Anshuman, Dipendu Bhunia, Bhavin Ramjiyani, "Solution of shear wall in multi-storey building", International journal of civil and structural engineering, Volume 2, no.2, 2011.
- [2] M Ashraf, Z. A. Siddiqui, M. A. Javed "Configuration of multi-storey building subjected to lateral forces", Asian journal of civil engineering, vol. 9, no.5, pp. 525-535, 2008.
- [3] Romy Mohammad C. Prabha (2011), "Dynamic analysis of rcc building with shear wall", International Journal of earth Science & Engineering, ISSN 0974-5904, Volume-4 pp.662.
- [4] S.V. Venkatesh & H. Sharda Bai (2011) , " Effect of Internal & External Shear wall on performance of building frame subjected to lateral load", International Journal of earth Science & Engineering, ISSN 0974-5904, Volume-6 pp.571-576.
- [5] " Comparative study of strength of RC Shear wall on different location on multi- storied Residential building " by Varsha Hame Civil Engineering department, ISSN 2278-3652 Volume -4 (2014) pp.391-400 @ Research India Publications.