

Development of K_Sim_Modeler for the dynamic solver including flexible parts

Dong Il Park, Chanhun Park, Doohyung Kim and Jinho Kyung

Department of Robotics and Mechatronics, Korea Institute of Machinery & Materials

Abstract— There are many kinds of commercial dynamic solvers for kinematic and dynamic analysis. Some programs contain various functions including analysis of flexible parts, integration with controller, optimization tool and so on. While the general-purpose dynamic solvers are useful for analysis of the various mechanisms, the customized dynamic solver is useful for the development of the specific system. Therefore, we are developing the specialized dynamic solver for the solar cell substrate handling robot. The solar cell substrate handling robot has flexible parts which are called forks or hands and it is necessary to apply the vibration control algorithm for the flexible parts and the high speed motion of the robot. So the dynamic solver K-Sim is being customized for the solar cell substrate handling robot system. It includes the rigid body dynamics, the flexible body dynamics for the beam element and the control element. It is composed of three parts. The first one is the modeler part to input the system model and the system parameter, the second one is the analysis part to analyze the kinematic and dynamic characteristic from the data inputted in the modeler part and the last part is post-processor part to display the result and the animation. In the paper, we developed the K_Sim modeler using GUI as the pre-processor of the specialized dynamic solver for the solar cell substrate handling robot.

Index Terms—Dynamics solver, Modeler, K-Sim, Flexible body

I. INTRODUCTION

There are many kinds of commercial dynamic solvers for kinematic analysis, dynamic analysis and various simulation. Some programs contain various functions including analysis of flexible parts, integration with controller, optimization tool and so on. While the general-purpose dynamic solvers are good for analysis of the various mechanisms, the customized dynamic solver is useful for the development of the specific system. Therefore, we are developing the specialized dynamic solver for the solar cell substrate handling robot. The solar cell substrate handling robot has flexible parts which are called forks or hands and it is necessary to apply the vibration control algorithm for the flexibility and the high speed of the system. So the dynamic solver K-Sim is being customized for the solar cell substrate handling robot system. It includes the rigid body dynamics, the flexible body dynamics for the beam element and the control element. It is composed of three parts. The first one is the modeler part to input the system model and the system parameter, the second one is the analysis part to analyze the kinematic and dynamic characteristic from the data inputted in the modeler part and the last part is post-processor part to display the result and the animation. In the paper, we developed the K_Sim modeler using GUI as the

pre-processor of the specialized dynamic solver for the solar cell substrate handling robot.

II. THE MAIN FUNCTION OF MODELER

The main functions of the developed modeler are the followings.

- (1) Inputting modeling component with GUI
 - Body: Rigid, Flexible
 - Joint: Fixed, Translational, Revolute, Spherical, Universal, Bracket
 - Motion: Rotational, Translational
 - Control: Sensor, Gain, Sum, DataIn, Saturation, Transfer Function, Differentiator
 - Force: Force, Torque, spring, Bushing, Rotational Spring
- (2) Connecting flow element represented as an arrow between components
- (3) Inputting property for each modeling component
- (4) Making an input file for K_Sim_Solver

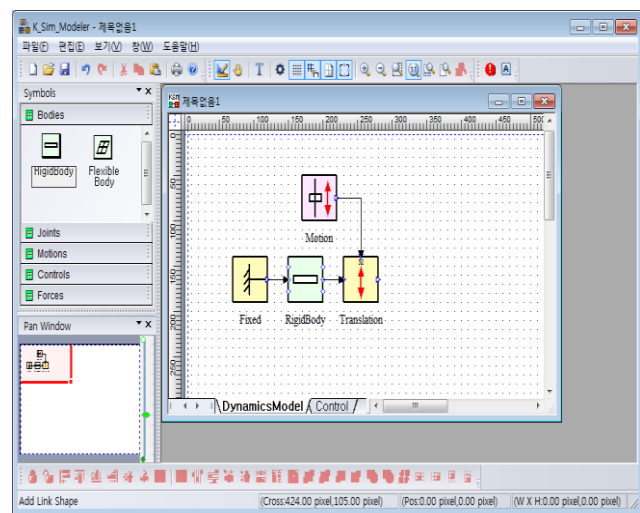


Fig. 1 Main program of the K_Sim_Modeler

III. MODELING COMPONENT

As mentioned above, there are many kinds of modeling components and they have their own symbol. Main components are classified into five categories as a body element, a joint element, a motion element, a control element and a force element. These five components are represented from table I to table V and each element has its own symbol as the table. There are a rigid body and a flexible body in the body element, a fixed joint, a translational joint, a revolute joint, a spherical joint, a universal joint and a bracket joint in

the joint element, a rotational motion and a translational motion in the motion element, a rotational sensor, a translational sensor, a gain, a sum (two input), a sum (three input), a data in, a saturation, an integrator, a differentiator and a transfer function in the control element and a force, a torque, a spring, a bushing and a rotational spring in the force element

Table I Body element



Body		Rigid Body
Symbol		Flexible Body

Table II Joint element







Joint Symbol		Fixed Joint
		Translational Joint
		Revolute Joint
		Spherical Joint
		Universal Joint
		Bracket Joint

Table III Motion element









Motion		Rotational Motion
Symbol		Translational Motion

Table IV Control element

Control Symbol		Rotational Sensor
		Translational Sensor
		Gain
		Sum (Two Input)
		Sum (Three Input)
		Data In










	Saturation
	Integrator
	Differentiator
	Transfer Function

Table V Force element

Force Symbol		Force
		Torque
		Spring
		Bushing
		Rotational Spring

IV. COMPONENT PROPERTY

There are five element categories and twenty five elements in K_Sim_Modeler as mentioned in the previous chapter. Each element has each property box according to the characteristic of each element. For example, a rigid body element has name, mass, inertia, body position, body angle and CAD file open in its property box and a flexible body element has element number, density, beam size, Young's modulus, Poisson's ratio, body position and material damping respectively. Two kinds of the property boxes are represented as Fig. 2 and Fig. 3. Figure 4 show an example of the joint property and Fig. 5 show an example of the sensor property.

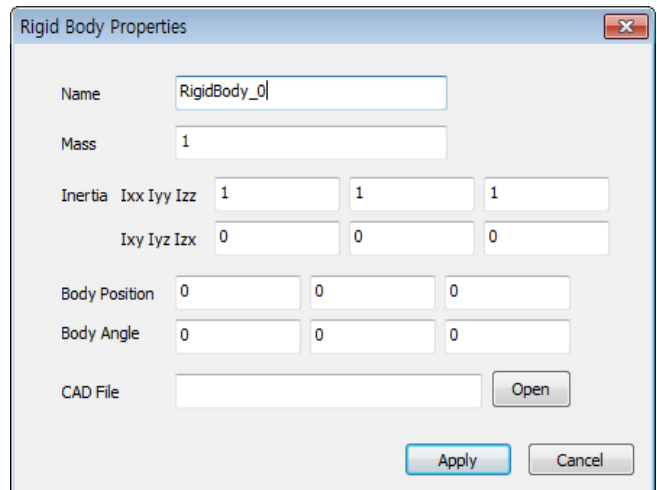


Fig. 2 Rigid body property

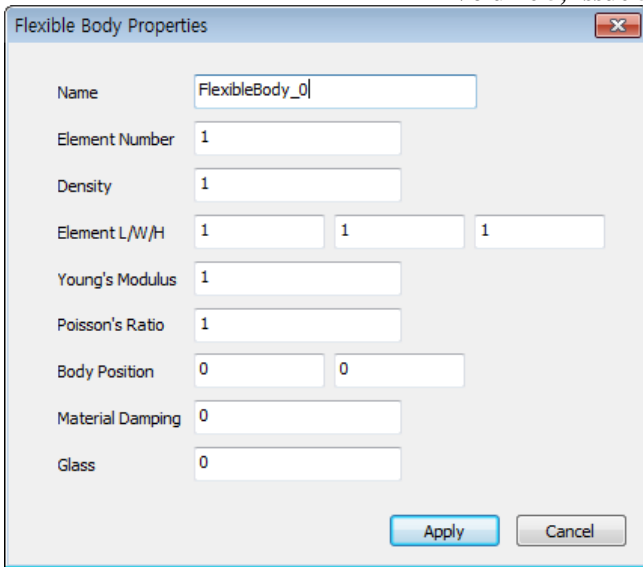


Fig. 3 Flexible body property

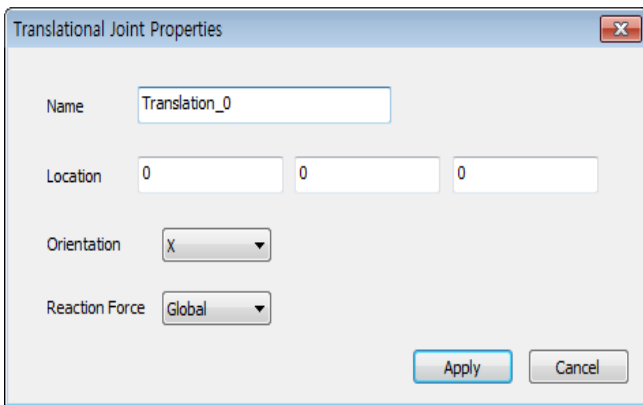


Fig. 4 Joint property

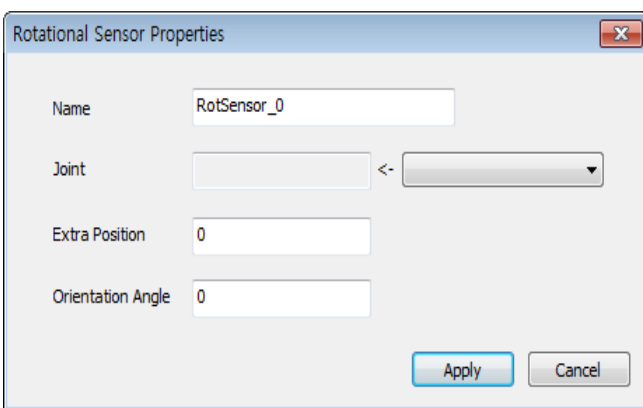


Fig. 5 Sensor property

V. MODELING OF THE SOLAR CELL ROBOT

The model of a solar cell substrate handling robot is constructed using the developed modeler with various customized elements for the solar cell robot. Figure 6 shows a template for dynamic analysis of only rigid bodies without control and Fig. 7 shows one for control.

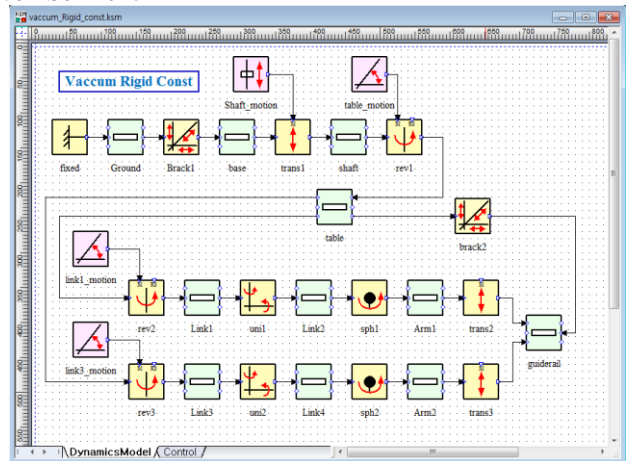


Fig. 6 Modeling of the solar cell substrate handling robot (Rigid body only, Dynamic analysis)

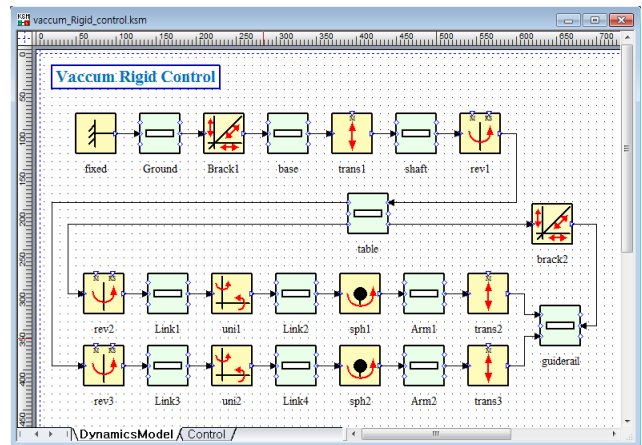


Fig. 7 Modeling of the solar cell substrate handling robot (Rigid body only, Control)

The template shown in Fig. 8 contains the flexible body and Fig. 9 shows an example of the control window.

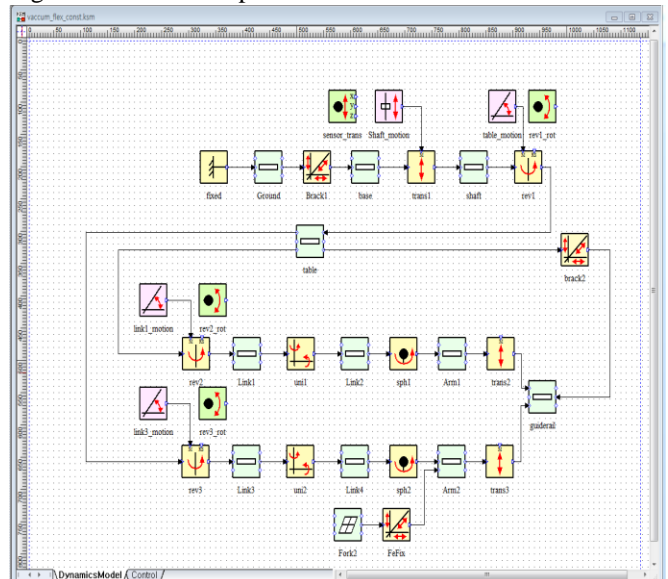


Fig. 8 Modeling of the solar cell substrate handling robot (Flexible body)

Dong Il Park received a BS degree in Mechanical Engineering from Korea Advanced Institute of Science and Technology (KAIST) in 2000, a MS degree in Mechanical Engineering from KAIST in 2002 and a PhD degree from KAIST in 2006. He has been researching the robotics in Korea Institute of Machinery and Materials (KIMM) since 2006. His research fields are the design, control and application of robot manipulators and mobile robots.

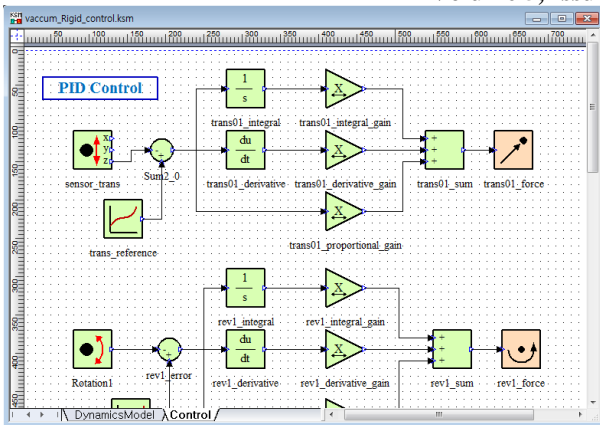


Fig. 9 An example of the control window

The modeling will be converted to an input file for K_Sim_Solver and can be used in the various simulations.

VI. CONCLUSION

We are developing the specialized dynamic solver for the solar cell substrate handling robot. The solar cell substrate handling robot has flexible parts which are called forks or hands and it is necessary to apply the vibration control algorithm for the flexibility and the high speed of the system. So the dynamic solver K-Sim is being customized for the solar cell substrate handling robot system. In the paper, we developed the K_Sim modeler using GUI as the pre-processor of the specialized dynamic solver for the solar cell substrate handling robot. The model of a solar cell substrate handling robot is constructed using the developed modeler. The modeling will be converted to an input file for K_Sim_Solver and can be used in the various simulations.

ACKNOWLEDGMENT

This paper was supported by the R&D program of Korea government.

REFERENCES

- [1] Ahmed. A. Shabana, Dynamics of multibody systems. Cambridge, 2005.
- [2] F. Schivao, G. Ferretti and L. Vigano, Object-Oriented Modeling and simulation of flexible multibody thin beams in modelica with the finite element method, Modelica 2005, 25-34, 2005.
- [3] F. Resta, F. Ripamonti, G. Cazzulani and M. Ferrari, Independent modal control for nonlinear flexible structures: an experimental test rig, Journal of Sound and Vibration, Volume 329, pp. 961-972, 2010.
- [4] Wook Hyeon Kim, Tae Won Park, Dong Il Park, "Development of flexible multibody dynamics program for beam type solar cell manipulator," The 6th Asian Conference on Multibody Dynamics, 2012, pp. 1-6.
- [5] Wook Hyeon Kim, Tae Won Park, Dong Il Park, "Vibration control of a flexible fork of a solar cell manipulator for accurate positioning in large vertical motion," ECCOMAS Multibody Dynamics 2013, Croatia, pp. 203-204.